


Underwater Lights



Aclimex-LED
Business & Market Development

IP68

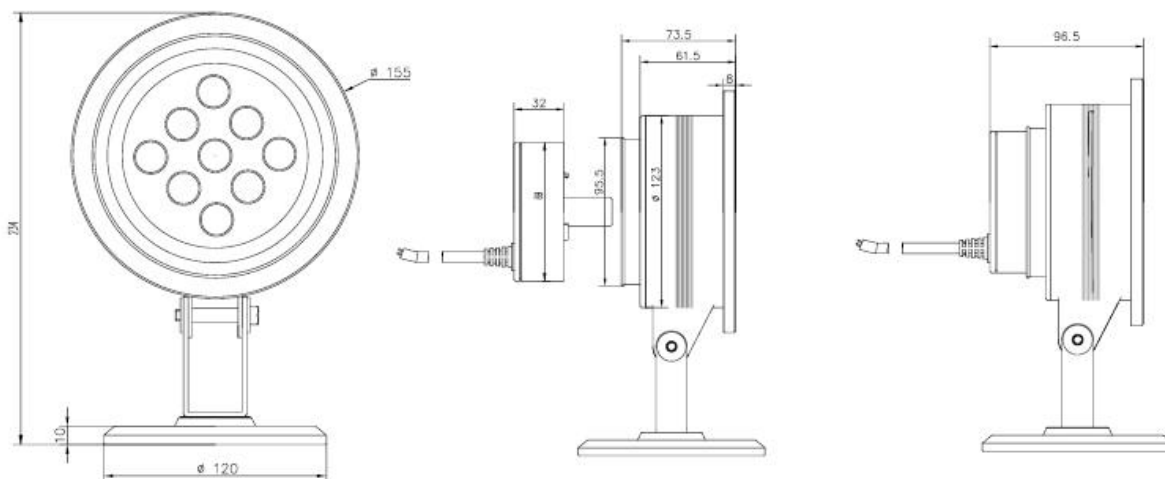

Specifications

LED Brand	CREE SEOUL
Ambient Humidity	10%-90%
Ambient Temperature	-20~50°
Driver	Induction
Housing Materials	Stainless steel 316L
Embedded Parts Material	Stainless steel 316L
Power Cord Specification	2*0.75mm ² silicone line

Item No.	Light souarth	Color temperature	Degree (°)	Rated Power (W)	Luminous flux (lm)	Input voltage (V)	Frequency (Hz)
SZ12	9*1W	3000K/6000K /RGB	25° 40° 60°	12W	900/1050/ /(1m)	DC 24V AC 200-240V	50-60 (Hz)
SZ18	9*2W	3000K/6000K /RGB	25° 40° 60°	18W	1400/1530/ /(1m)	DC 24V AC 200-240V	50-60 (Hz)

Distributor in Switzerland :

Hervé Mauduit c/o CA-Nuance SA – ZI Le Trési 6A – 1028 Prévèrenge – Switzerland
www.ca-nuance.ch - hmauduit@ca-nuance.ch - Tel : +41 21 803 07 77