




LED Underground Lights

IP67

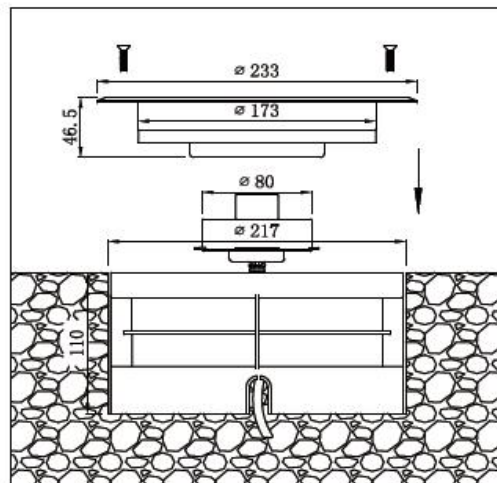

Aclimex-LED
Business & Market Development

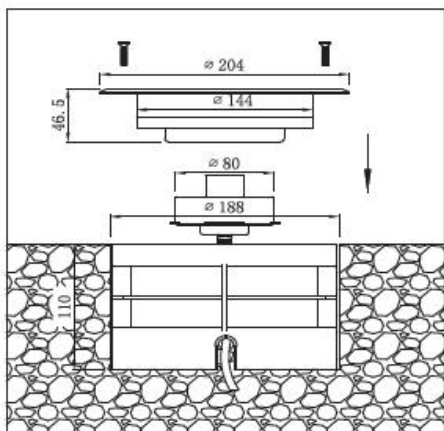

Specifications

LED Brand	CREE SEOUL
Ambient Humidity	10%~90%
Ambient Temperature	-20° ~ 50°
Driver	Induction
Housing Materials	Stainless steel
Embedded Parts Material	ABS
Power Cord Specification	2*0.75mm ² silicone line



Item No.	Light souarth	Color temperature	Degree (°)	Rated Power (W)	Luminous flux (lm)	Input voltage (V)	Frequency (Hz)
BDY195	9*1W~3W	3000K/6000K /RGB	25° 40° 60°	9W	750/810/ / (lm)	AC200~240V	50-60 (Hz)
BDY230	12*1W~3W	3000K/6000K /RGB	25° 40° 60°	18W	1400/1530/ / (lm)	AC200~240V	50-60 (Hz)

Distributor in Switzerland :

Hervé Mauduit c/o **CA-Nuance SA** – ZI Le Trési 6A – 1028 Préverengues – Switzerland
www.ca-nuance.ch - hmauduit@ca-nuance.ch - Tel : +41 21 803 07 77